




RallyComp EVO Footprint

Rev 3/05/23

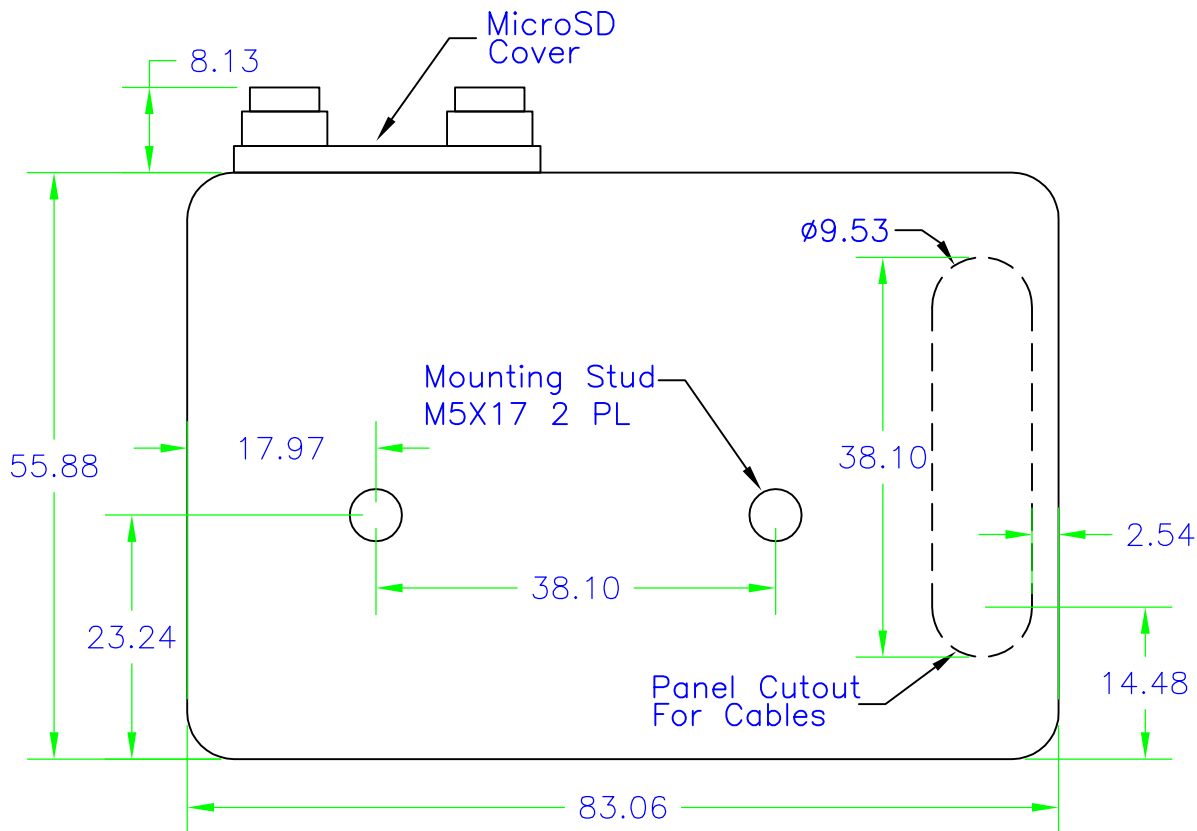

Notes:

1. Unit must be mounted with user supplied Rubber Isolation Grommets and RC supplied rubber washers
2. Rear cables must not interfere or contact Mounting Bracket, See Panel Cutout above
3. Minimum 3mm Gap Between RallyComp and other components
4. Micro SD cover must be accessible
5. Power must be run direct from battery
6. Contact RMS for Power Cables and other RallyComp accessories.
7. Scale 1:1, Dimensions in mm