


## RallyComp Tracker Footprint Rev 6/10/22

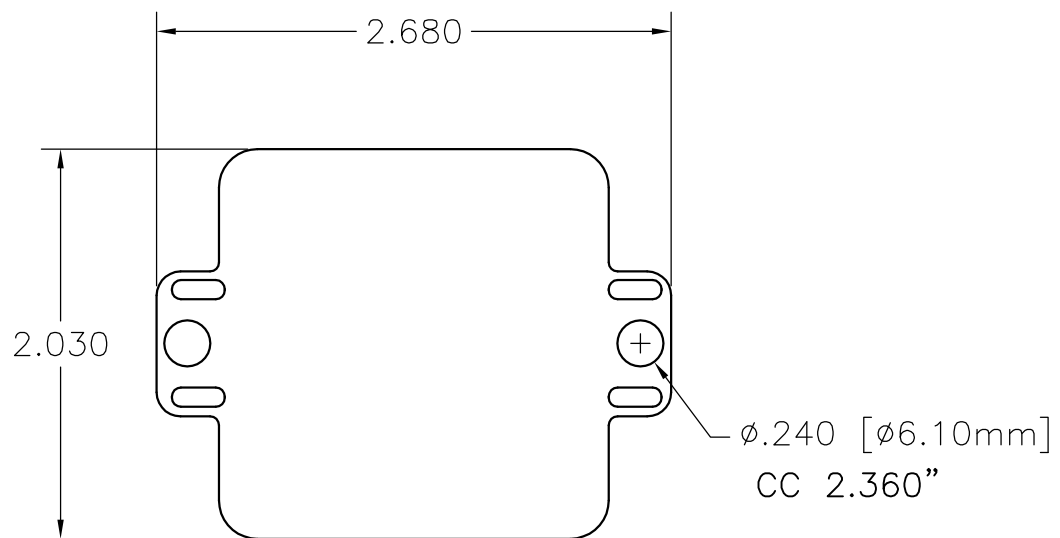

### Notes:

1. Tracker can be mounted on handlebar brake or clutch cylinder
2. Tracker must have 360 degree clear view of the sky. Any obstruction will affect performance.
3. Tracker is supplied with foam adhesive tape but must also be secured with cable ties or screws.